



SPECIALIZED TECH INC.
Gas Well Desanding Services



2008/10/15

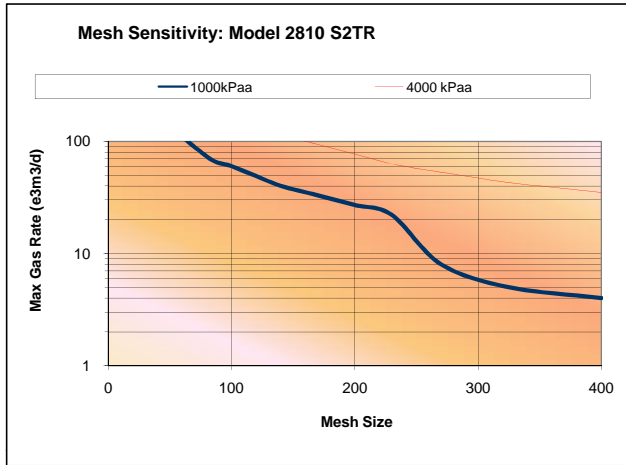

Model 2810 S2TR

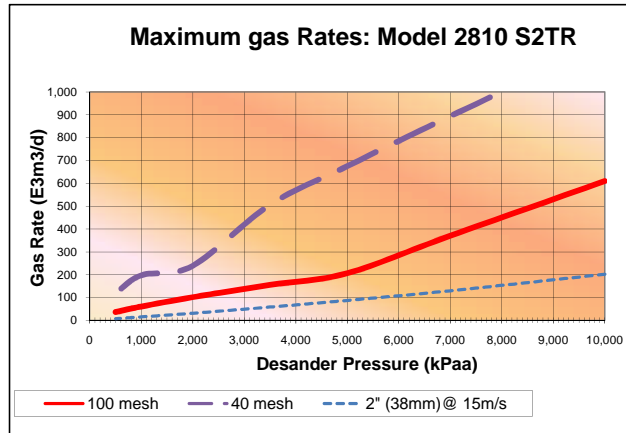

*** Chart performance is intended for dry gas

MAWP	1,440 psi [9,928 kPa]
ANSI	600
MDMT	-20F [-28.9C]

DESIGNATED SERVICE	Sweet
WEIGHT (EMPTY)	1,155 kg
LENGTH	4.1m
LIQUID VOLUME	37l
SAND CAPACITY	60 kg
FITTING CONFIGURATION	2" threaded

Gells, foam & emulsions have been know to cause sand carry over.

Desander Performance below 29 API not proven

Recommended Sand Laden velocities: below 15m/s is considered optimal, above 30m/s increases the risk of erosive failure

Recommended Clean Fluid velocities: below 30m/s is considered optimal, above 45m/s increases the risk of erosive failure

