



SPECIALIZED TECH INC.
Gas Well Desanding Services



2008/09/24

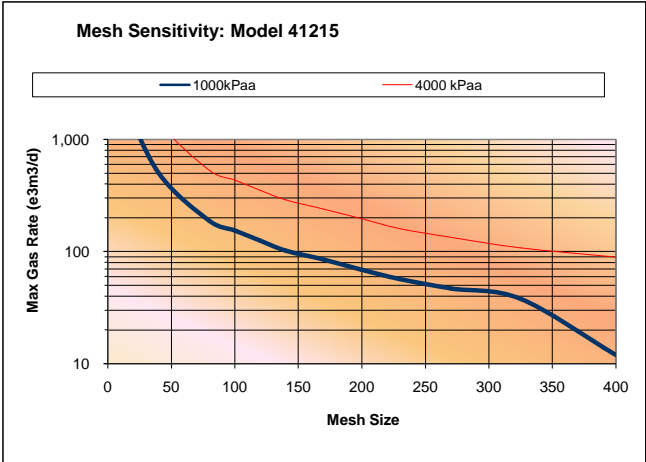

Model 41215

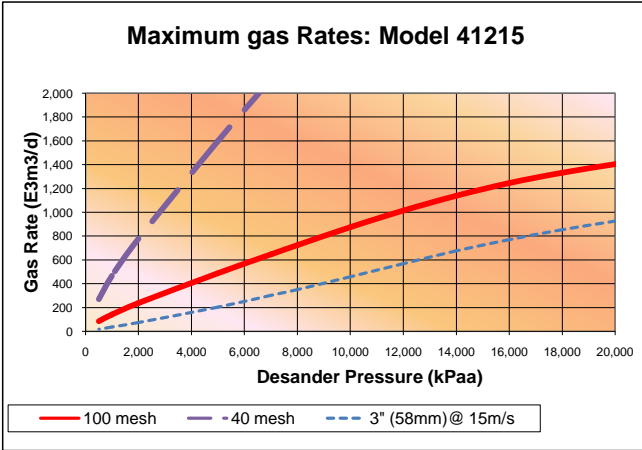

*** Chart performance is intended for dry gas

MAWP	2,900psi [19,995 kPa]
ANSI	1500
MDMT	-20F [-28.9C]
	-50F [-44C]
DESIGNATED SERVICE	AB Sour
WEIGHT (EMPTY)	1,990 kg
LENGTH	6.83 m
LIQUID VOLUME	140 l
SAND CAPACITY	0.22 tonne
FITTING CONFIGURATION	2" threaded
	2 & 3" flanged

Gells, foam & emulsions have been know to cause sand carry over.

Desander Performance below 29 API not proven

Recommended Sand Laden velocities: below 15m/s is considered optimal, above 30m/s increases the risk of erosive failure

Recommended Clean Fluid velocities: below 30m/s is considered optimal, above 45m/s increases the risk of erosive failure