



SPECIALIZED TECH INC.
Gas Well Desanding Services

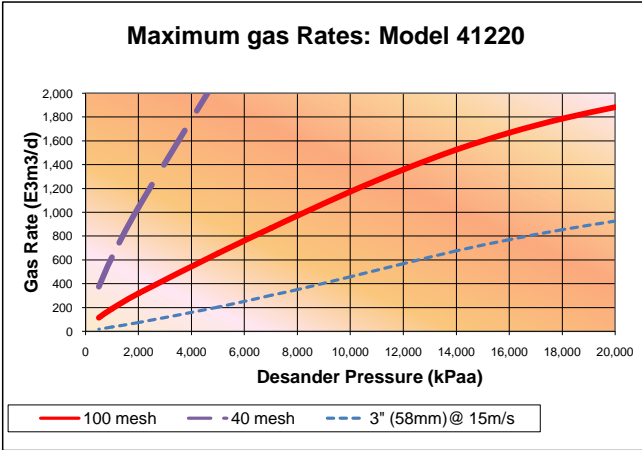

2008/09/24

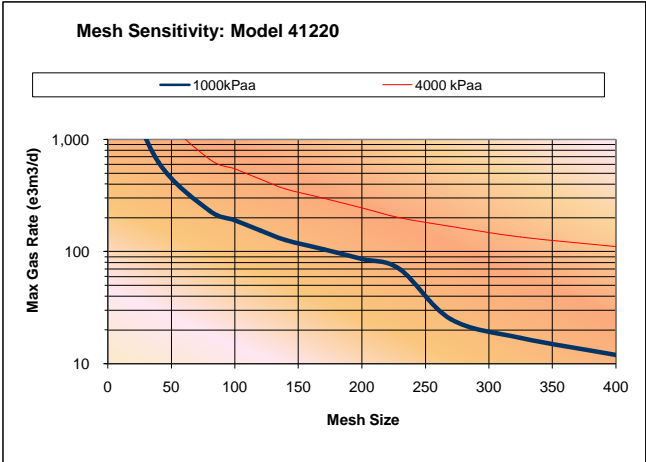

*** Chart performance is intended for dry gas

MAWP 2,900psi [19,995 kPa]
 ANSI 1500
 MDMT -50F [-44C]

DESIGNATED SERVICE AB Sour
 WEIGHT (EMPTY) 2,650 kg
 LENGTH 8.35 m
 LIQUID VOLUME 188 l
 SAND CAPACITY 0.3 tonne
 FITTING CONFIGURATION 3" flanged

Gells, foam & emulsions have been know to cause sand carry over.

Desander Performance below 29 API not proven

Recommended Sand Laden velocities: below 15m/s is considered optimal, above 30m/s increases the risk of erosive failure

Recommended Clean Fluid velocities: below 30m/s is considered optimal, above 45m/s increases the risk of erosive failure