



**SPECIALIZED TECH INC.**  
Gas Well Desanding Services



2008/09/24

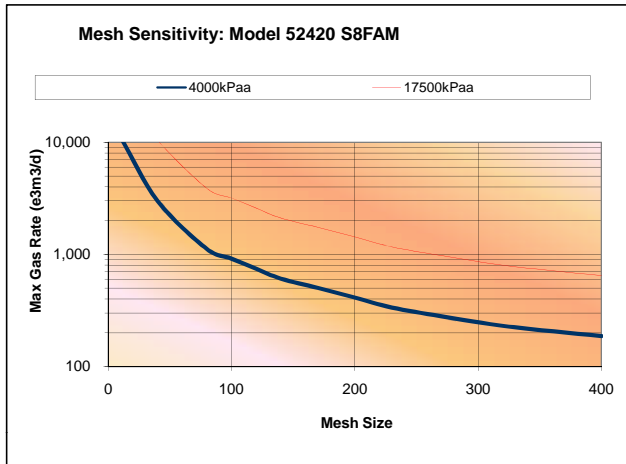

Model 52420 S8FAM

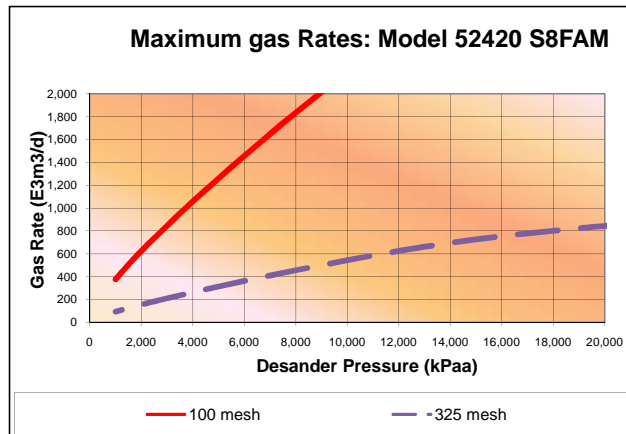

MAWP	2,900psi [19,995 kPa]
ANSI	1500
MDMT	-20F [-28.9C]

DESIGNATED SERVICE	AB Sour
WEIGHT (EMPTY)	9,500 kg
LENGTH	7.19 m
LIQUID VOLUME	420 l
SAND CAPACITY	.6 tonne
FITTING CONFIGURATION	8" Flanged

\*\*\* Chart performance is intended for dry gas

Gells, foam & emulsions have been know to cause sand carry over.

Desander Performance below 29 API not proven

Recommended Sand Laden velocities: below 15m/s is considered optimal, above 30m/s increases the risk of erosive failure

Recommended Clean Fluid velocities: below 30m/s is considered optimal, above 45m/s increases the risk of erosive failure