



SPECIALIZED TECH INC.
Gas Well Desanding Services



2008/09/22

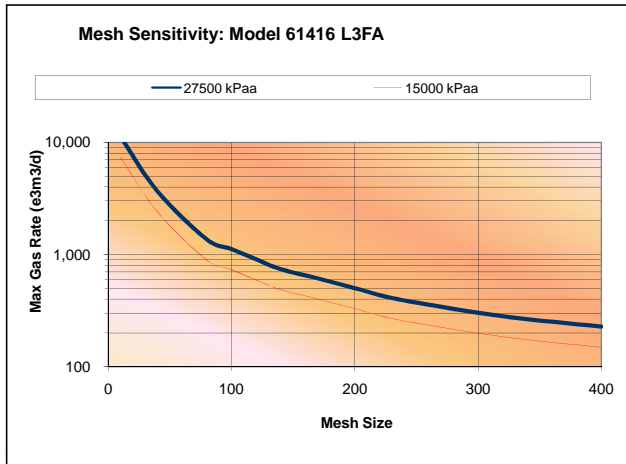

Model 61416 L3FA

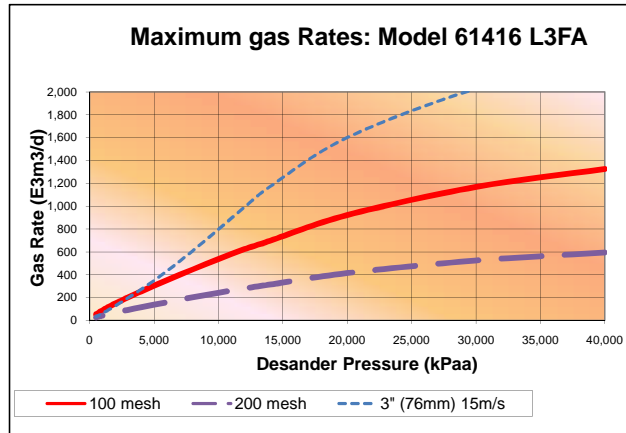

*** Chart performance is intended for dry gas

MAWP	6160psi [42,450 kPa]
ANSI	2500
MDMT	-50F [-44C]

DESIGNATED SERVICE	AB Sour
WEIGHT (EMPTY)	4,525 kg
LENGTH	5.8 m
LIQUID VOLUME	100 l
SAND CAPACITY	0.18 tonne
FITTING CONFIGURATION	3" flanged

Gells, foam & emulsions have been know to cause sand carry over.

Desander Performance below 29 API not proven

Recommended Sand Laden velocities: below 15m/s is considered optimal, above 30m/s increases the risk of erosive failure

Recommended Clean Fluid velocities: below 30m/s is considered optimal, above 45m/s increases the risk of erosive failure