



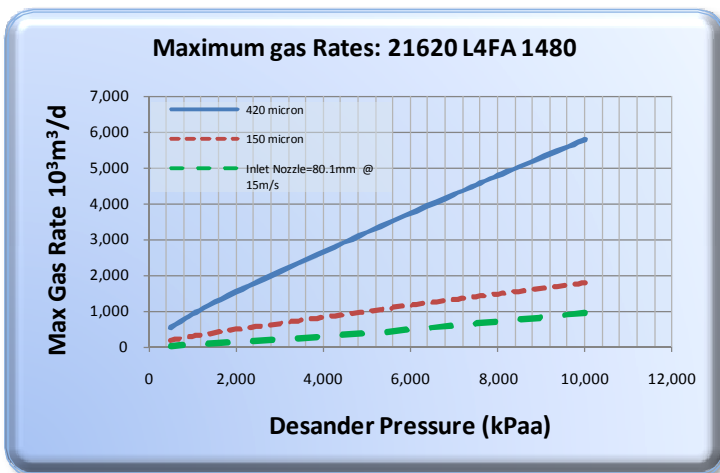

## STI Model 21620-1480 S2TR

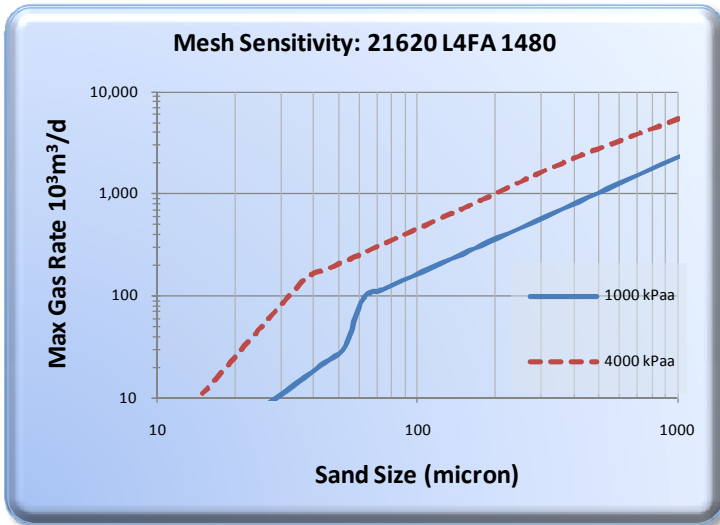

MAWP	1,480 psi [10,200 kPa]
ANSI	600
MDMT	-50F [-44C]
DESIGNATED SERVICE	Nace
WEIGHT (EMPTY)	2,990 kg
LENGTH	8.3m
LIQUID VOLUME	485 L
SAND CAPACITY	861 kg
FITTING CONFIGURATION	4" Flanged

\*\*\* Chart performance is intended for dry gas

Gells, foam & emulsions have been known to cause sand carry over

Desander Performance below 29 API not proven

Recommended Sand Laden velocities: below 15m/s is considered optimal, above 30m/s increases the risk of erosive failure

Recommended Clean Fluid velocities: below 30m/s is considered optimal, above 45m/s increases the risk of erosive failure