



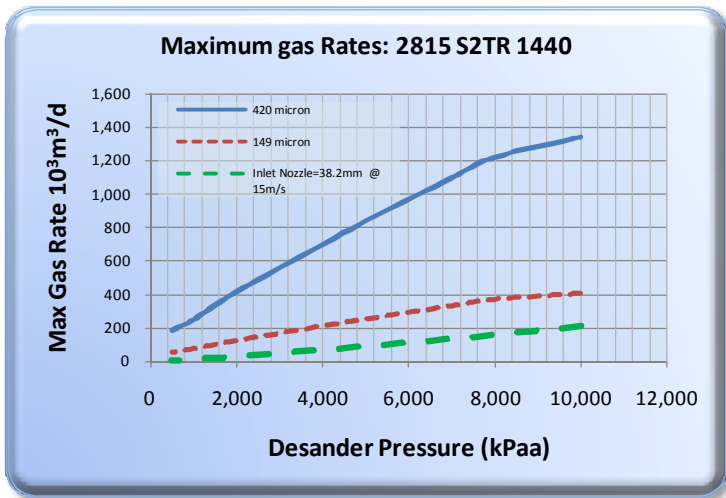

STI Model 2815-1440 S2TR

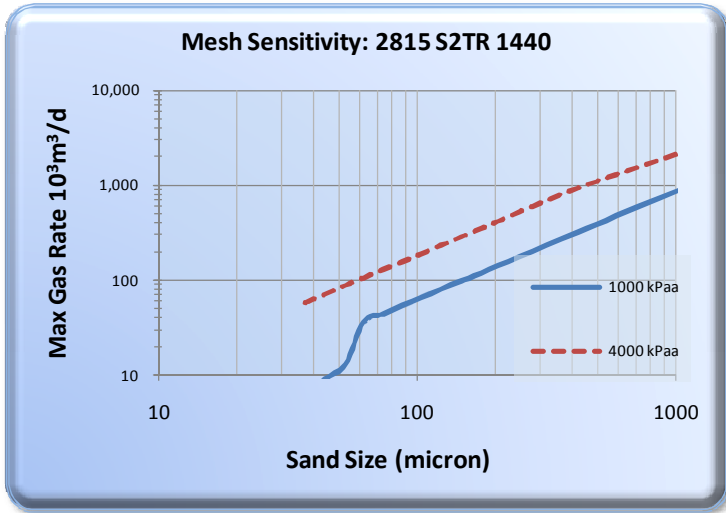

MAWP	1,440 psi [9,928 kPa]
ANSI	600
MDMT	-20F [-28.9C]
DESIGNATED SERVICE	Sweet
WEIGHT (EMPTY)	1,155 kg
LENGTH	6.8m
LIQUID VOLUME	56 L
SAND CAPACITY	99 kg
FITTING CONFIGURATION	2" threaded

*** Chart performance is intended for dry gas

Gells, foam & emulsions have been known to cause sand carry over

Desander Performance below 29 API not proven

Recommended Sand Laden velocities: below 15m/s is considered optimal, above 30m/s increases the risk of erosive failure

Recommended Clean Fluid velocities: below 30m/s is considered optimal, above 45m/s increases the risk of erosive failure