



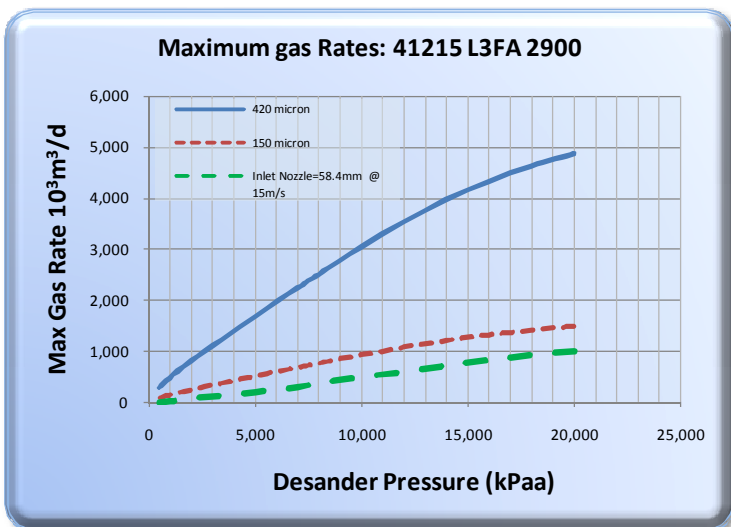

STI Model 41215-2900 L3FA

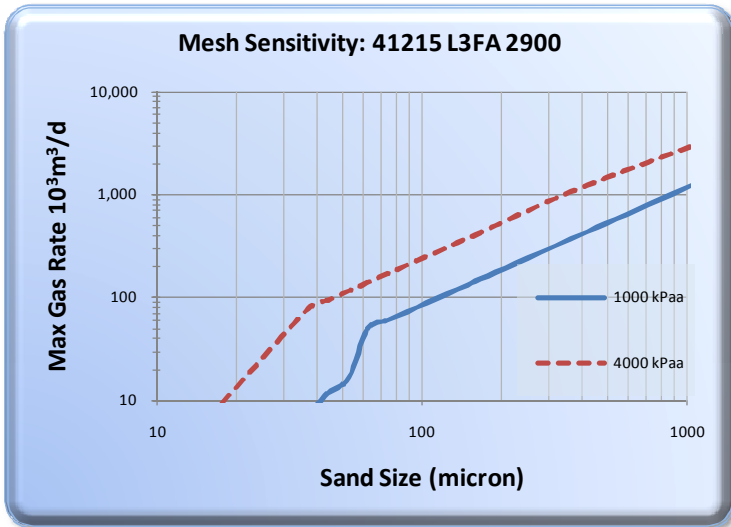

MAWP	2,900 psi [19,995 kPa]
ANSI	1500
MDMT	-50F [-44C]
DESIGNATED SERVICE	AB Sour
WEIGHT (EMPTY)	1,990 kg
LENGTH	6.8 m
LIQUID VOLUME	147 L
SAND CAPACITY	260 kg
FITTING CONFIGURATION	3" Flanged

*** Chart performance is intended for dry gas

Gells, foam & emulsions have been known to cause sand carry over

Desander Performance below 29 API not proven

Recommended Sand Laden velocities: below 15m/s is considered optimal, above 30m/s increases the risk of erosive failure

Recommended Clean Fluid velocities: below 30m/s is considered optimal, above 45m/s increases the risk of erosive failure