



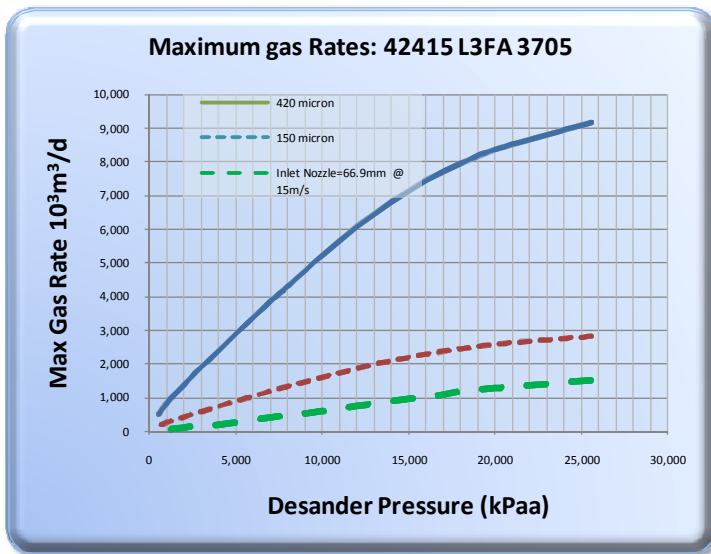

## STI Model 42415-3705 L3FA

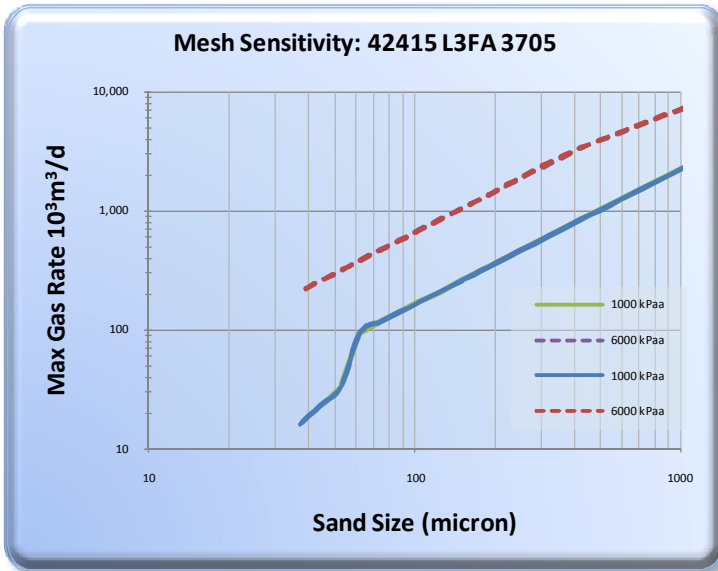

MAWP	3,705 psi [25,545 kPa]
ANSI	1500
MDMT	-50F [-44C]
DESIGNATED SERVICE	AB Sour
WEIGHT (EMPTY)	4,672 kg
LENGTH	5.7m
LIQUID VOLUME	717 L
SAND CAPACITY	1,174 kg
FITTING CONFIGURATION	3" Flanged

\*\*\* Chart performance is intended for dry gas

Gells, foam & emulsions have been known to cause sand carry over  
Desander Performance below 29 API not proven

Recommended Sand Laden velocities: below 15m/s is considered optimal, above 30m/s increases the risk of erosive failure

Recommended Clean Fluid velocities: below 30m/s is considered optimal, above 45m/s increases the risk of erosive failure