



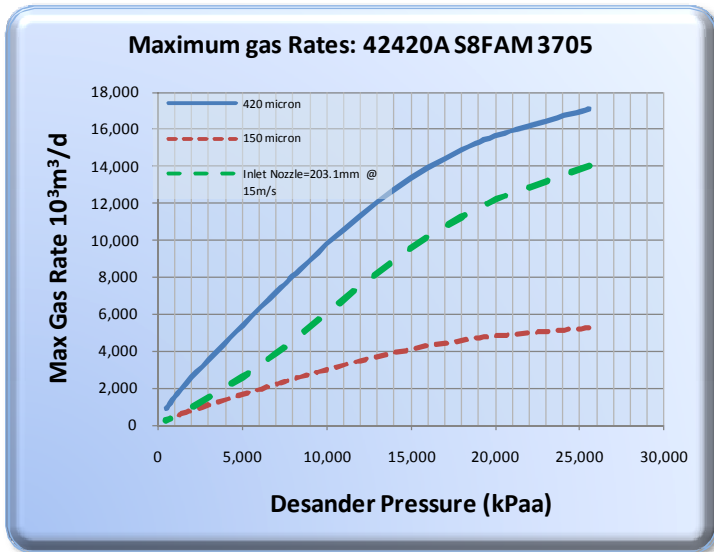

## STI Model 42420A-3705 S8FAM

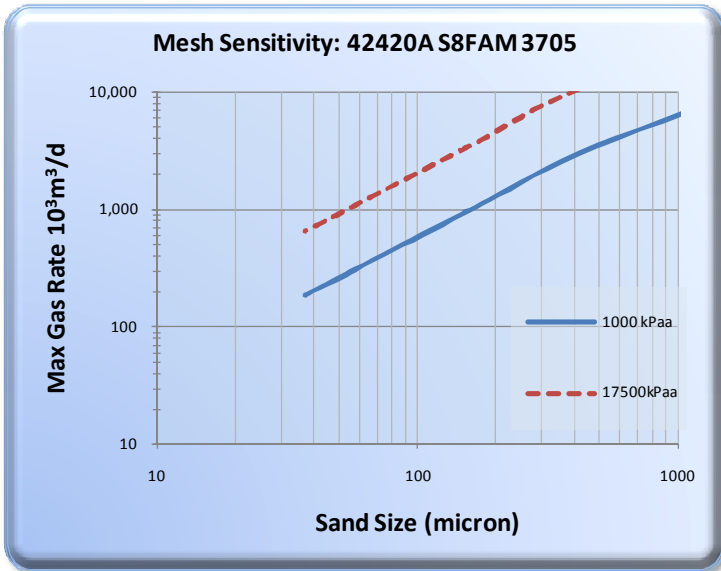

MAWP	3,705 psi [25,545 kPa]
ANSI	1500
MDMT	-20F [-29C]
DESIGNATED SERVICE	AB Sour
WEIGHT (EMPTY)	9,750 kg
LENGTH	7.2m
LIQUID VOLUME	416 L
SAND CAPACITY	739 kg
FITTING CONFIGURATION	8" Flanged

\*\*\* Chart performance is intended for dry gas

Gells, foam & emulsions have been known to cause sand carry over  
Desander Performance below 29 API not proven

Recommended Sand Laden velocities: below 15m/s is considered optimal, above 30m/s increases the risk of erosive failure  
Recommended Clean Fluid velocities: below 30m/s is considered optimal, above 45m/s increases the risk of erosive failure