



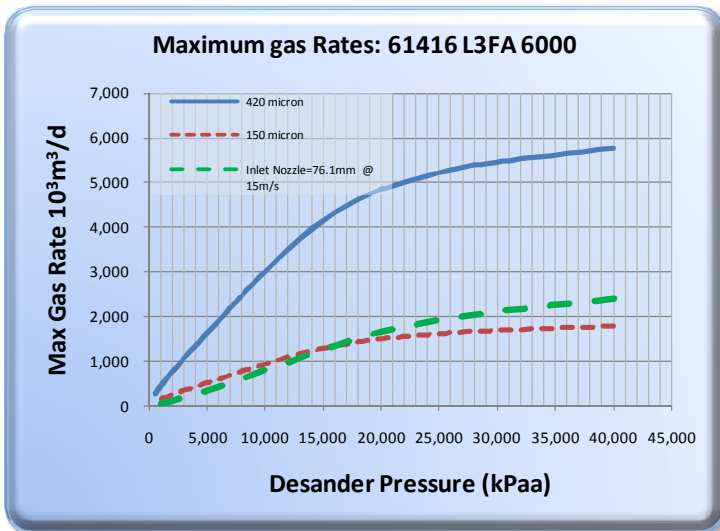

## STI Model 61416-6000 L3FA

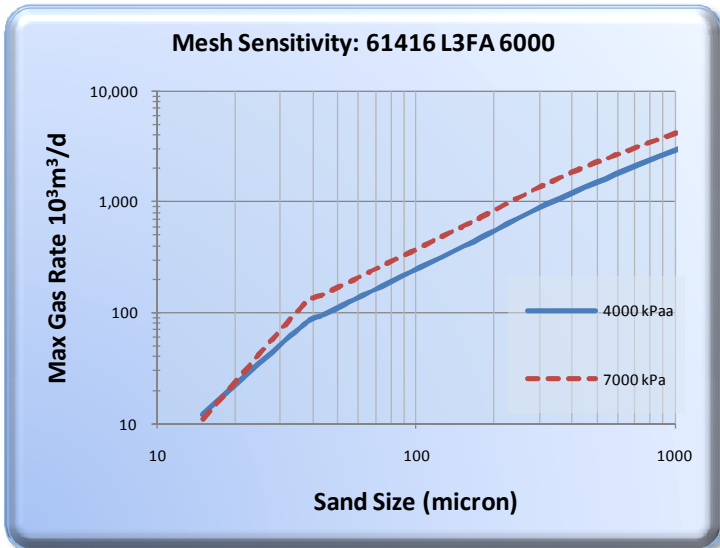

MAWP	6,000 psi [41,370 kPa]
ANSI	2500
MDMT	-50F [-44C]
DESIGNATED SERVICE	Nace
WEIGHT (EMPTY)	4525 kg
LENGTH	4.9 m
LIQUID VOLUME	171 L
SAND CAPACITY	304 kg
FITTING CONFIGURATION	3" Flanged

\*\*\* Chart performance is intended for dry gas

Gells, foam & emulsions have been known to cause sand carry over

Desander Performance below 29 API not proven

Recommended Sand Laden velocities: below 15m/s is considered optimal, above 30m/s increases the risk of erosive failure

Recommended Clean Fluid velocities: below 30m/s is considered optimal, above 45m/s increases the risk of erosive failure