



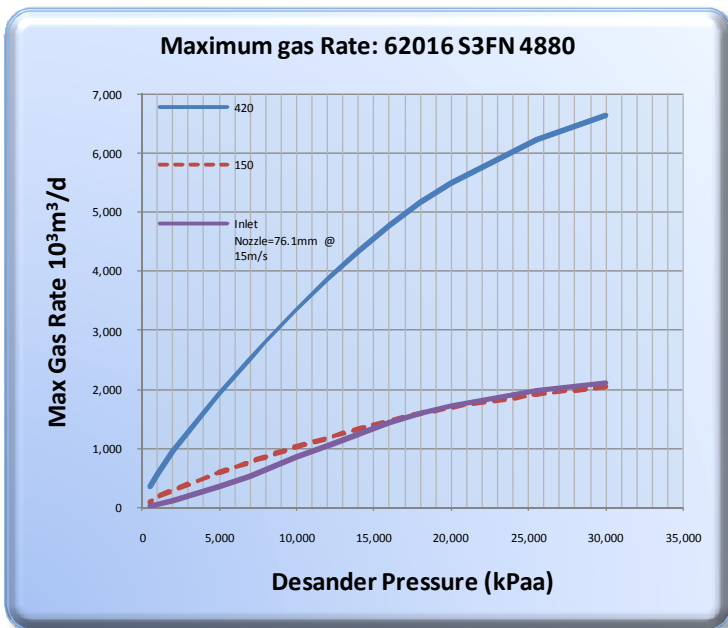

STI Model 62016-4880 S3FA

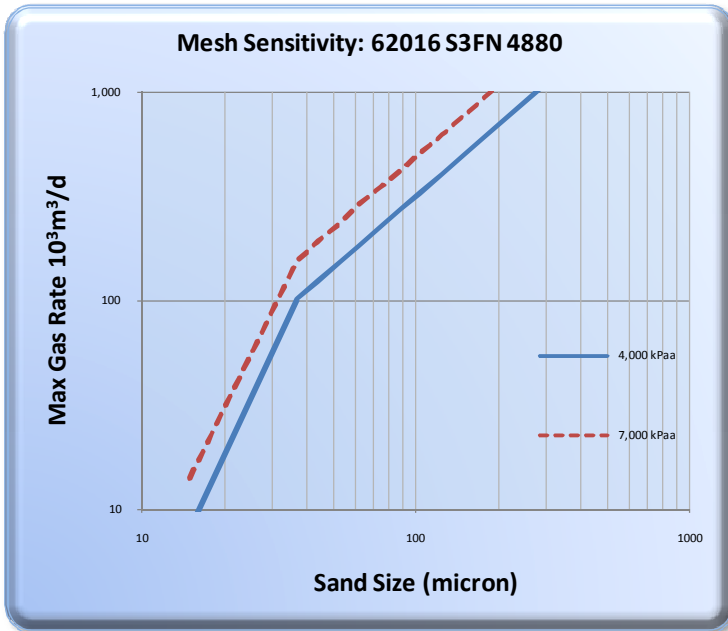

MAWP	4,880 psi [33,647 kPa]
ANSI	2500
MDMT	-20F [-29C]
DESIGNATED SERVICE	AB Sour
WEIGHT (EMPTY)	7,256 kg
LENGTH	4.8m
LIQUID VOLUME	394 L
SAND CAPACITY	647 kg
FITTING CONFIGURATION	3" Flanged

*** Chart performance is intended for dry gas

Gells, foam & emulsions have been known to cause sand carry over

Desander Performance below 29 API not proven

Recommended Sand Laden velocities: below 15m/s is considered optimal, above 30m/s increases the risk of erosive failure

Recommended Clean Fluid velocities: below 30m/s is considered optimal, above 45m/s increases the risk of erosive failure