



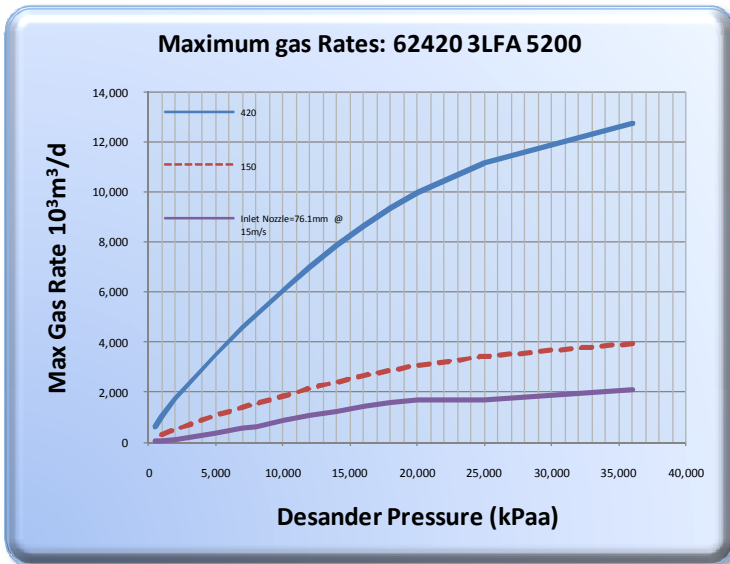

## STI Model 62420-5200 L3FA

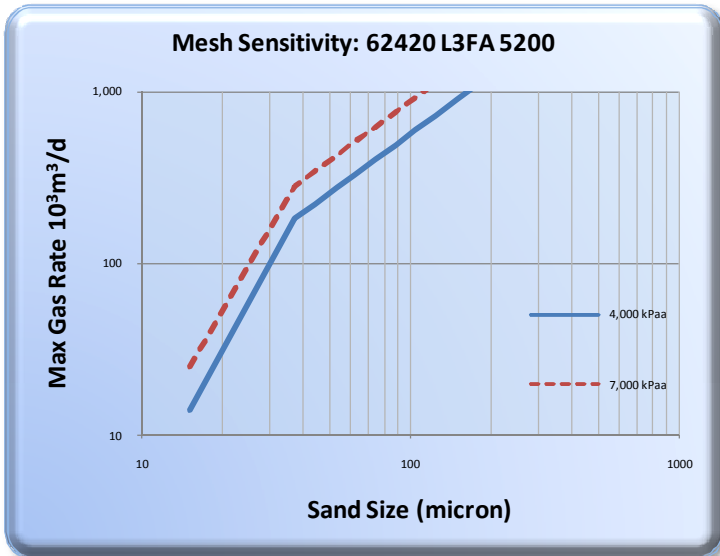

MAWP	5,200 psi [35,854 kPa]
ANSI	2500
MDMT	-50F [-44C]
DESIGNATED SERVICE	AB Sour
WEIGHT (EMPTY)	11,000 kg
LENGTH	7.3m
LIQUID VOLUME	698 L
SAND CAPACITY	1239 kg
FITTING CONFIGURATION	3" Flanged

\*\*\* Chart performance is intended for dry gas

Gells, foam & emulsions have been known to cause sand carry over

Desander Performance below 29 API not proven

Recommended Sand Laden velocities: below 15m/s is considered optimal, above 30m/s increases the risk of erosive failure

Recommended Clean Fluid velocities: below 30m/s is considered optimal, above 45m/s increases the risk of erosive failure